

Step by Step 2-post sign assembly instructions:



1. Lay sign components on ground as shown, assemble treated wood lumber support posts (not supplied -see below).

Option#1): Purchase four treated wood 2x4's from your local lumber yard. These will be buried in the ground (below frost line in your area) and extend up into the hollow PVC post sleeves. Screw them together as shown in photo #1. The inside 2x4 should only come up to within 2" below the bottom of the sign "tab" inside your PVC post sleeve (the sign "tab" should not be resting on top of the inside 2x4). The outside 2x4 should be trimmed to end up about 8" below the top of the PVC post sleeve.

Option #2): You could also use two 4x4's instead of four 2x4's in this step. The height of your 4x4 sticking out of the ground will need to be trimmed to go up into your sign post and end about an inch below the bottom part of your sign "tab".



2. Insert sign "tabs" into pre-cut channels in top of posts (both sides).



2a.



3. Insert special "clips" as shown down into both post tops.



3a.



4. Screw top of clip down to top of sign "tab" on inside of posts.



5. Lay sign down and slide treated wood posts up into bottom of sign posts.




5a.



6. Pre-drill holes on inside of sign posts near bottom. Insert stainless steel screws.



7. Dig your 2 holes spaced accordingly for your post bottoms.

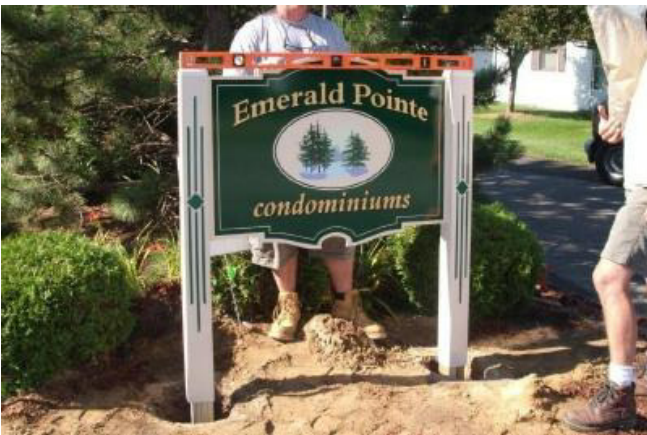

8. Pick up entire sign and carefully lower into holes. Check for level and straighten accordingly.

For larger sized signs, you may choose to add "post-hole" concrete to your holes prior to backfilling with the dirt. ("Post Hole concrete" does not need to be premixed, you can just pour into your hole straight from the bag and then pour water on top of it, it will harden up on its own then.)



9. Backfill your holes. Install post caps and your sign is complete!